





Ringkabelschuhe / Cosses à œillet

DIN 46234

DIN 46234

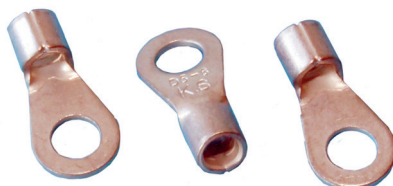

Material:
Matière:

Kupfer, verzinkt, verlötet
Cuivre, étamé, soudé

Normierung:
Norme:

UL listed Cat. ZMVV
CSA listed Cat. ZMVV7
DIN 46234

Br.Nr. No. art.	Querschnitt Section mm ²	Schraub Vis Dim/dim	l mm	d2 mm	d2 mm	VE UE Stk/pcs			
B1528R	0,5 - 1,5	M2,5	11,0	6,0	2,7	100			
B1532R	0,5 - 1,5	M3	11,0	6,0	3,7	100			
B1543R	0,5 - 1,5	M4	12,0	8,0	4,1	100			
B1553R	0,5 - 1,5	M5	13,0	10,0	5,3	100			
B1565R	0,5 - 1,5	M6	13,0	10,0	6,5	100			
B1584R	0,5 - 1,5	M8	17,0	14,0	8,4	100			
B1510R	0,5 - 1,5	M10	17,0	14,0	10,5	100			
B2532R	1,5 - 2,5	M3	11,0	6,0	3,2	100			
B2537R	1,5 - 2,5	M3,5	11,0	6,0	3,7	100			
B2543R	1,5 - 2,5	M4	11,6	6,8	4,3	100			
B2553R	1,5 - 2,5	M5	14,0	10,0	5,3	100			
B2565R	1,5 - 2,5	M6	16,0	11,0	6,5	100			
B2585R	1,5 - 2,5	M8	17,0	14,0	8,4	100			
B2510R	1,5 - 2,5	M10	17,0	15,0	10,5	100			
B2512R	1,5 - 2,5	M12	20,0	18,0	13,0	100			
B4643R	4,0 - 6,0	M4	14,0	8,0	4,3	100			
B4653R	4,0 - 6,0	M5	15,0	10,0	5,3	100			
B4663R	4,0 - 6,0	M6	16,0	11,0	6,5	100			
B4683R	4,0 - 6,0	M8	19,0	14,0	8,4	100			
B4610R	4,0 - 6,0	M10	21,0	18,0	10,5	100			
B4612R	4,0 - 6,0	M12	21,0	18,0	13,0	100			
B1053R	10,0	M5	16,0	10,0	5,3	100			
B1065R	10,0	M6	17,0	11,0	6,5	100			
B1084R	10,0	M8	20,0	14,0	8,4	100			
B1010R	10,0	M10	21,0	18,0	10,5	100			