


22260518	DATA SHEET	
Valid from: 21.12.2023	AB-C3-M12Y-(L*)PUR-M8FA	

Product description

- Sensor/actuator cable, 3-pol, PUR halogen-free, black
- Straight Y-plug M12 on 2x angled M8-jack



General characteristics

Number of pins	3
Ambient temperature	-25 °C bis +90 °C (-13°F bis 194°F) (plug / jack) -40 °C bis +80 °C (-40°F bis 176°F) (cable, fixed installation) -25 °C bis +80 °C (-13°F bis 176°F) (cable, movable installation)
Degree of protection	IP65 / IP67 / IP68
Coding	A-standard
Tightening torque	0,4 Nm (M12-connector) 0,2 Nm (M8-connector)

Variation

Article number	Description	Length [m]	Configuration
22260518	AB-C3-M12Y-0,3PUR-M8FA	0,3	straight - angled, angled
22260519	AB-C3-M12Y-0,6PUR-M8FA	0,6	straight - angled, angled
22260520	AB-C3-M12Y-1,0PUR-M8FA	1,0	straight - angled, angled
22260521	AB-C3-M12Y-2,0PUR-M8FA	2,0	straight - angled, angled

Additional note

Data sheet also valid for variant lengths. Other lengths on request.

Electrical properties


Rated voltage	48 V AC / 60 V DC
Rated current	4 A
Overvoltage category	II
Pollution degree	3

Mechanical properties

Plug, jack

Inflammability class in accordance with UL 94	HB
Contact, material	CuSn
Contact carrier, material	TPU GF
Contact surface, material	Ni/Au
Knurl, material	Zinc diecasting, nickel-plated
Handle, material	TPU, flame retardant, self-extinguishing
Seal, material	NBR

Creator: THLE3/PDP Released: IVSE1/PDP	Document: DB22260518EN Version: 08	Page 1 of 3
---	---------------------------------------	-------------

22260518	DATA SHEET	
Valid from: 21.12.2023	AB-C3-M12Y-(L*)PUR-M8FA	


Line

Cable construction	3 x AWG24/32
Signal line, construction	32 x 0,1 mm
Conductor cross-section	0,25 mm ²
Conductor diameter including isolation	1,17 mm ± 0,02 mm
Cable outer diameter	4,4 mm ± 0,15mm
Insulation color	brown, blue, black
Sheath color	grey-black, RAL 7021
Number of bending cycles	10.000.000
Bending radius	44 mm
Traveling distance	10 m
Traveling speed	3 m/s
Acceleration	10 m/s ²
Cable weight	18 kg/km
Outer coating, material	PUR
Wire insulation, material	PP
Insulation resistance	≥ 100 GΩ*km (at 20 °C)
Conductor resistance	≤ 78 Ω/km (at 20 °C)
Flame resistance	acc. to UL 758 / 1581 FT2 DIN EN 60332-2-2 (20 s)
Halogen-free	acc. to DIN VDE 0472 Part 815
Oil resistance	acc. to DIN EN 60811-2-1
Other resistances	resistant to hydrolysis and microbes good resistant to acids, lyes and solvents limited UV resistance acc. to DIN EN ISO 4892-2-A resistant to sea water

Standards


Product standard, M12 connector	IEC 61076-2-101
Product standard, M8 connector	IEC 61076-2-104

Creator: THLE3/PDP Released: IVSE1/PDP	Document: DB22260518EN Version: 08	Page 2 of 3
---	---------------------------------------	-------------

22260518	DATA SHEET	
Valid from: 21.12.2023	AB-C3-M12Y-(L*)PUR-M8FA	


Technical drawing

Dimensional drawing

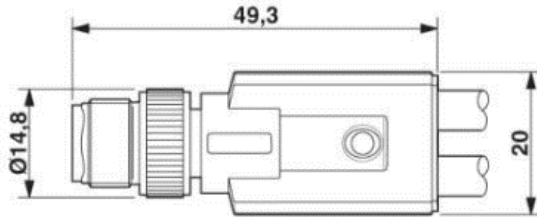


Plug Y, M12 x 1, straight

Dimensional drawing

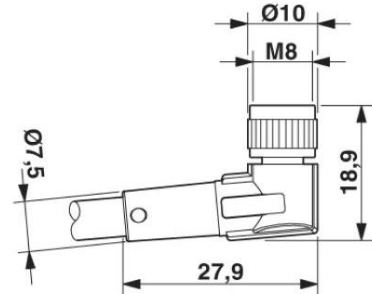


Jack M8 x 1, angled

Drawing

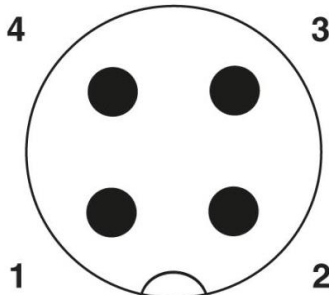


Pin assignment M12-plug Y, 4-pol, A-coding

Drawing




Pin assignment M8-jack, 3-pol, A-coding

Circuit diagram

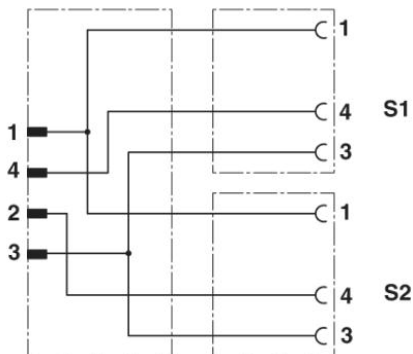

Pin assignment between M12-plug Y and M8-jack

Wire cross section



Application range

For increased mechanical load and rough operating conditions

Note

Photographs are not true to scale and do not represent detailed images of the respective products.

Creator: THLE3/PDP Released: IVSE1/PDP	Document: DB22260518EN Version: 08	Page 3 of 3
---	---------------------------------------	-------------