

Part number

CX 03 MP



Modular insert, Mixo series, for pneumatic contacts, 1 module, with 3 seats for tube diameter 3 - 4 - 6 mm

Product description

| | |
|------------------------|---|
| Product type | Modular insert |
| Series | Mixo |
| Connection type | Pneumatic |
| N. of poles | 3 poles |
| Size | 1 module |
| Specification | With 3 seats for tube diameter 3 - 4 - 6 mm |

Further technical details

| | |
|---|---|
| Mating cycles | ≥ 500 / ≥ 10.000 with HNM frames and enclosures |
| Insulation resistance | ≥ 10 GΩ |
| Weight | 6,50 g |
| Operating temperature range (min, max) | -40°C...+80°C |
| UL 94 flammability rating | V-0 |

Material properties

| | |
|------------------------------|--------------------|
| Main material | Polycarbonate (PC) |
| Colour | RAL 5015 blue |
| RoHs conformity | Compliant |
| China RoHs - EFUP | E |
| REACH SVHC substances | No |

General ordering information

| | |
|-------------------|---------------|
| EAN13 code | 8015747182140 |
| eCl@ss 8.1 | 27440205 |
| ETIM 7.0 | EC000438 |

Packaging Information


| | |
|----------------------------------|----------------------|
| Packaging length | 180,00 mm |
| Packaging height | 120,00 mm |
| Packaging width | 155,00 mm |
| Packaging weight | 0,58 kg |
| Packaging volume | 3,35 dm ³ |
| Packaging description | Carton box |
| Packaging quantity | 60 Pcs |
| Packaging EAN code | 8015747182157 |
| Sub-packaging length | 35,00 mm |
| Sub-packaging height | 40,00 mm |
| Sub-packaging width | 155,00 mm |
| Sub-packaging weight | 0,10 kg |
| Sub-packaging volume | 0,22 dm ³ |
| Sub-packaging description | Carton tray |
| Sub-packaging quantity | 10 Pcs |
| Sub-packaging EAN barcode | 8015747182164 |

Part number

CX 03 MP



Catalogue drawings

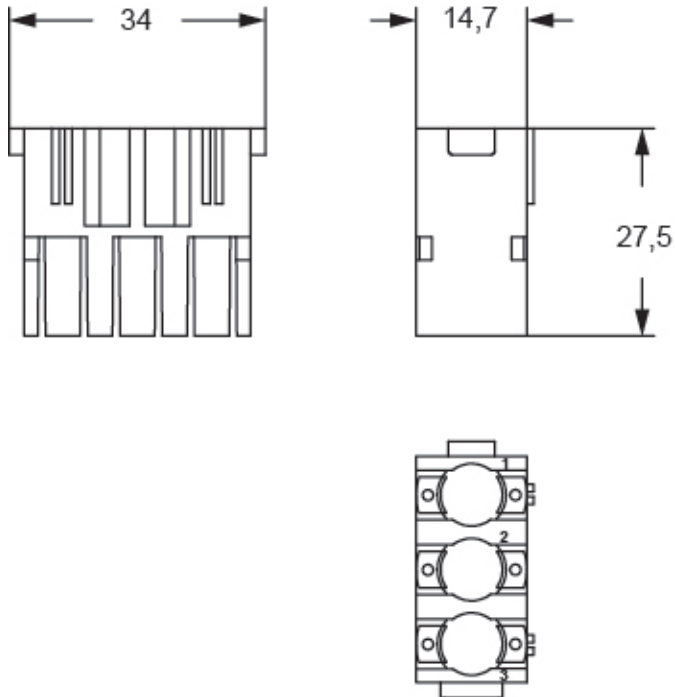

Notes

Warnings:

1) CRM/F CX code pins and guides must be used for pneumatic contacts modules. These pins also provide coding if pneumatic contacts modules are used exclusively.

Use of units for pneumatic contacts

- pneumatic contacts for pressure values up to 10 bar, for use with clean and dry compressed air
- possibility of using tubes with different diameters in the same modular unit
- female contacts with or without closing valve
- working temperature range - 40 °C ÷ + 80 °C
- use of tubes with Ø 3 - 4 and 6 mm, and possible replacement of tubes with assembled units. Tube with

• ID inner Ø (push-over attachment of tubes over barbed straight contacts):

CX xx MPF/M, CX xx MPV

• OD outer Ø (push-in attachment of tubes to the quick-fitting contacts):

CX xx MPQF/M, CX xx MPAV, CX xx MPAF/M, CX xx MPQV

without notice.

Dimensions shown in mm are not binding and may be changed